

LED Office Pendant Light

MDL1007N/MDL1007W

Product Features

- Stretch aluminum bracket, high strength, excellent heat dissipation performance
- Several surface treatment and color optional, beautiful and generous
- Messenger wire installation, simple operation
- Can be continuous stitching, no obvious stitching dark area
- Back-lit, luminous uniform without dark area
- High performance LED chips, high lumen efficiency and low light decay;
- No UV, infrared radiation, no mercury environmental protection.

Application

- Office
- Conference Room
- School



LED Office Pendant Light

MDL1007N/MDL1007W

MEGAMAN®

PRODUCT DATASHEET

20W/40W/30W/60W

General Information Data

Electrical parameters

Rated Voltage 220-240VAC

Rated Frequency 50/60Hz

Life Data

Life Time 25000h

Switch Times > 12500

Operation Data

IP IP20

Operating Temperature -20°C~+40°C

Storage Temperature -20°C~+60°C

Mechanical Data

Housing Material AL

Cover Material PS

Other

SDCM <6

Certification CB/ROHS



Base Specification

Model	Watts (W)	PF	Luminous Flux (lm)	Efficacy (lm/W)	Ra	Beam Angle
MDL1007N 40W 3000K	40W	0.9	3200	80	80	120°
MDL1007N 40W 4000K	40W	0.9	3200	80	80	120°
MDL1007N 40W 6500K	40W	0.9	3200	80	80	120°
MDL1007W 60W 4000K	60W	0.9	4800	80	80	120°
MDL1007W 60W 6500K	60W	0.9	4800	80	80	120°

LED Office Pendant Light

MDL1007N/MDL1007W




PRODUCT DATASHEET


20W/40W/30W/60W

Photometric Diagram





MDL1007N 40W 6500K



MDL1007W 60W 6500K



Dimensional Drawing & Packaging Information

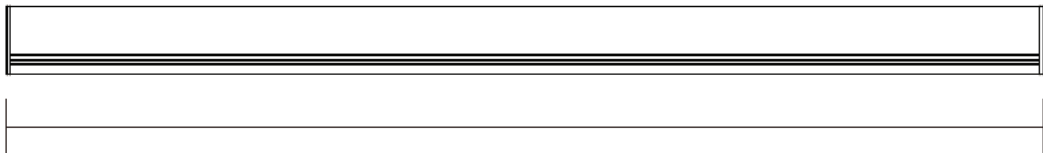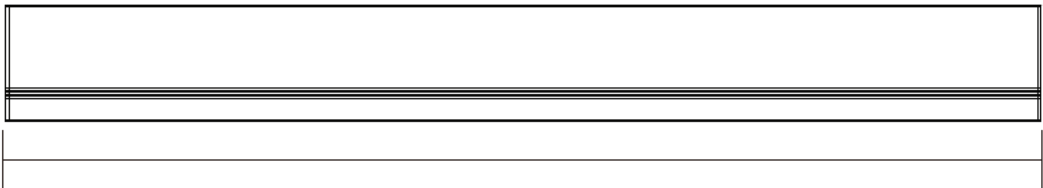

Model	L (mm)	W (mm)	H (mm)	Single Box Dimension (L*W*H)mm	Outer Box Dimension (L*W*H)mm	Packaging Unit (PCS/CTN)
MDL1007N 40W	1200	35	66	1240*80*42		20
MDL1007W 60W	1200	66	55	1230*70*70		10
MDL1007W 60W	1200	66	55	1230*70*70		10

LED Office Pendant Light


MDL1007N/MDL1007W

MEGAMAN®

PRODUCT DATASHEET

20W/40W/30W/60W

Accessories

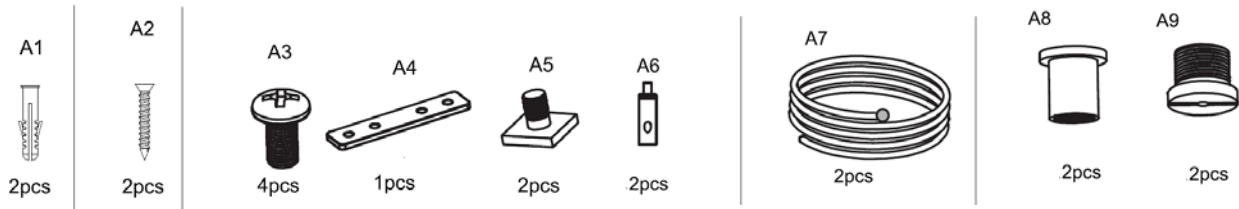

Installation Guide

