

Low Voltage SMD STRIP LIGHT

YTSLA01-FPC

MEGAMAN®

PRODUCT DATASHEET

12W



Product Features

- Easy to bend, can be arbitrary modeling;
- High quality and high light efficiency SMD/2835 LED chips;
- Adopt high quality PCB board, low voltage drop;
- Lighting effect uniform, can meet the requirements of linear lighting;
- Low voltage DC drive, safe and reliable;
- With 3M tape on the back, easy to install, firm and do not fall off.

Application

- Home
- Hotel
- Entertainment venues
- Cabinet, counter
- Advertising board



Low Voltage SMD STRIP LIGHT

YTSLA01-FPC

General Information Data



Electrical parameters	
Rated Voltage	24VDC
Rated Frequency	-
Life Data	
Life Time	25000h
Switch Times	12500
Operation Data	
IP	IP20
Operating Temperature	-20°C~+40°C
Storage Temperature	-20°C~+60°C
Mechanical Data	
Housing Material	-
Other	
SDCM	<5
Certification	CB/ROHS



Base Specification

Model	Watts (W)	PF	Luminous Flux (lm)	Efficacy (lm/W)	Ra	Beam Angle	LED chip 2835
YTSLA01-FPC 12W 6500K	12W	-	1200	100	80	120°	120L
YTSLA01-FPC 12W 4000K	12W	-	1200	100	80	120°	120L
YTSLA01-FPC 12W 3000K	12W	-	1080	90	80	120°	120L

Dimensional Drawing

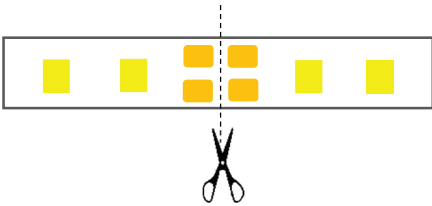

Model	A (mm)	Cutting(mm)
YTSLA01-FPC 12W	8	50

Packaging Information

Model	Single Bag Dimension (L*W)mm	Medium Box Dimension (L*W*H)mm	Outer Box Dimension (L*W*H)mm	Total length (m)
YTSLA01-FPC 12W	160*180	166*68*185	355*340*200	5

