

LED Downlight Surface Mount

MXTL1033-Y

MEGAMAN®

PRODUCT DATASHEET

15W/24W/30W



Product Features

- Ultra-thin shape, simple and beautiful;
- Complete size, serialized style shape;
- Back-lit, luminous uniform without dark area
- Enough space behind the lamp, easy installation and wiring
- High performance LED chips, high lumen efficiency and low light decay;
- Flicker free, effectively protect eyesight;
- No UV, infrared radiation, no mercury environmental protection.

Application

- Home
- Shop, Store, Mall
- Office
- Conference Room
- Corridor



LED Downlight Surface Mount

MXTL1033-Y

MEGAMAN®

PRODUCT DATASHEET

15W/24W/30W

General Information Data

Electrical parameters

Rated Voltage 170-240VAC

Rated Frequency 50/60Hz

Life Data

Life Time 15000h

Switch Times > 7500

Operation Data

IP IP20

Operating Temperature -20°C~+45°C

Storage Temperature -20°C~+60°C

Mechanical Data


Housing Material Plastic

Cover Material PC

Other

SDCM <6

Certification CB/ROHS

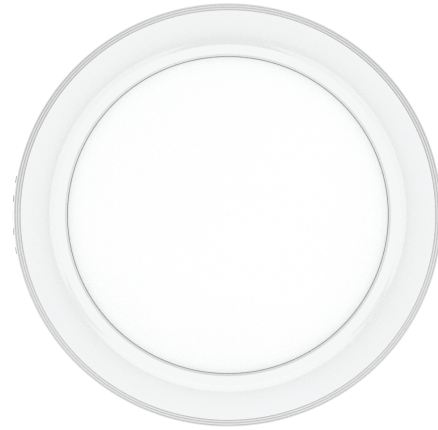


Base Specification


Model	Watts (W)	PF	Luminous Flux (lm)	Efficacy (lm/W)	Ra	Beam Angle
MXTL1033-Y 15W 3000K	15W	0.5	1200	80	80	120°
MXTL1033-Y 15W 4000K	15W	0.5	1350	90	80	120°
MXTL1033-Y 15W 6500K	15W	0.5	1350	90	80	120°
MXTL1033-Y 24W 3000K	24W	0.5	1920	80	80	120°
MXTL1033-Y 24W 4000K	24W	0.5	2160	90	80	120°
MXTL1033-Y 24W 6500K	24W	0.5	2160	90	80	120°
MXTL1033-Y 30W 3000K	30W	0.5	2400	80	80	120°
MXTL1033-Y 30W 4000K	30W	0.5	2700	90	80	120°
MXTL1033-Y 30W 6500K	30W	0.5	2700	90	80	120°

Photometric Diagram


MXTL1033-Y 15W



MXTL1033-Y 24W



MXTL1033-Y 30W



LED Downlight Surface Mount


MXTL1033-Y



PRODUCT DATASHEET

15W/24W/30W

Dimensional Drawing & Packaging Information

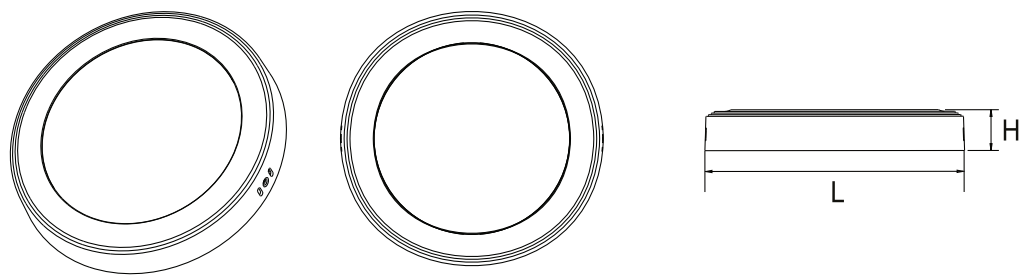

Model	L (mm)	H (mm)	Single Box Dimension (L*W*H)mm	Outer Box Dimension (L*W*H)mm	Packaging Unit (PCS/CTN)
MXTL1033-T 15W	Ø180	25	183*28*183	570*310*385	60
MXTL1033-T 24W	Ø220	25	228*28*228	475*310*475	40
MXTL1033-T 30W	Ø250	25	253*28*253	525*310*270	20

Installation Guide

