

LED Ceiling light

MXL1075

MEGAMAN®

PRODUCT DATASHEET

24W/36W



Tri-color Switchable

Product Features

- A piece of jade, simple ultra-thin shape design, white and flawless;
- Soft and uniform light, no strobe, bring a healthy home lighting environment;
- Good backlighting effect, aesthetics of multilayer layer of lighting;
- User-friendly installation design, easy rotation to complete the installation;
- High brightness and light efficiency (up to 100lm/W), energy saving and environmental protection
- Ceiling mounting and lifting are both available
- Insect and dust proof, very easy for maintenance;
- No UV, infrared radiation, no mercury environmental protection.



Application

- Bedroom
- Living room
- Balcony
- Corridor
- Office



LED Ceiling light

MXL1075

MEGAMAN®

PRODUCT DATASHEET

24W/36W

General Information Data

Electrical parameters	
Rated Voltage	170-240VAC
Rated Frequency	50/60Hz
Safety Class	Class II
Life Data	
Life Time(L70)	25000h
Switch Times	12500
Operation Data	
IP	IP40
Operating Temperature	-20°C~+40°C
Storage Temperature	-20°C~+60°C
Mechanical Data	
Housing Material	Plastic
Cover Material	Plastic
Other	
SDCM	<6
Certification	CB/ROHS



Base Specification

Model	Watts (W)	PF	Luminous Flux (lm)	Efficacy (lm/W)	Ra	Beam Angle
MXL1075 24W D290 6500K	24W	0.5	2400	100	80	120°
MXL1075 24W D290 (3IN1)	24W	0.5	2160/2400	90/100	80	120°
MXL1075 36W D350 6500K	36W	0.9	3600	100	80	120°
MXL1075 36W D350 (3IN1)	36W	0.9	3240/3600	90/100	80	120°

LED Ceiling light


MXL1075




PRODUCT DATASHEET

24W/36W

Photometric Diagram

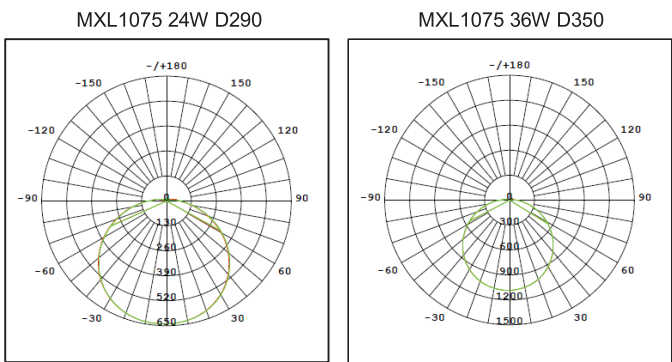

Dimensional Drawing

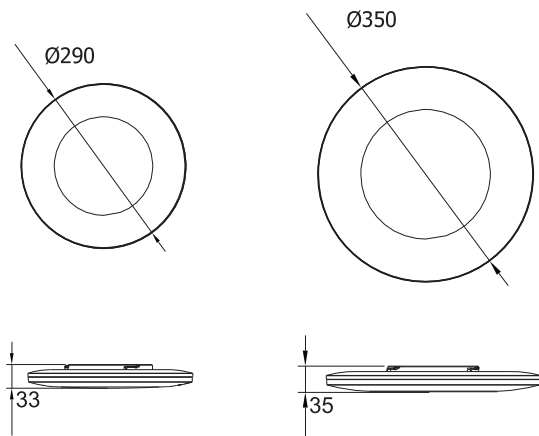

Model	Size(mm)
MXL1075 24W D290	Ø290*33
MXL1075 36W D350	Ø350*35

Packaging Information

Model	Single Box Dimensions (L*W*H)mm	Outer Box Dimensions (L*W*H)mm	Packaging Unit (PCS/CTN)	Net Weight (Kg)	Gross Weight (Kg)
MXL1075 24W D290	292*292*45	605*520*310	20	7.0	10.1
MXL1075 36W D350	350*350*50	530*365*365	10	5.1	7.3

