



Product Features

- Die-casting aluminum housing provide the heat sink with excellent thermal management
- 24° precise light distribution
- High color rendering index Ra80
- Multi-color optional
- Flicker free



24° precise light distribution



Adjustable Angle



COB design

Applications

- Shopping mall
- High ceiling
- Hotel
- Exhibition hall





General information



Model Number	MQTL2085
Wattage	10W
Luminous Efficiency	70lm/W
Lumen	700lm @4000K&6500K 600lm @ 3000K
Input Voltage	220-240V
CCT	3000K/4000K/6500K
CRI	Ra>80
Power Factor	>0.5
Beam Angle	24°
UGR	UGR<16
Class	ClassII
Driver	External
Dimming Type	-
SDCM	<5
Working Temperature	-20 – 50℃
LED Chips	SANAN
Product Size(mm)	Φ 85*75
Housing	Aluminum die-casting
Lifespan	30,000Hours

Dimension and installation ways

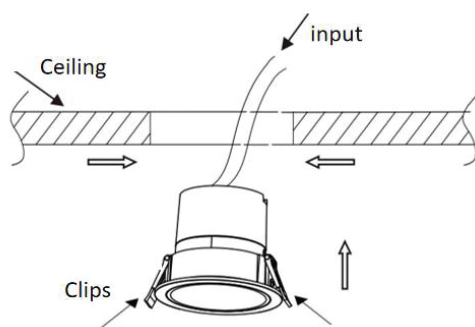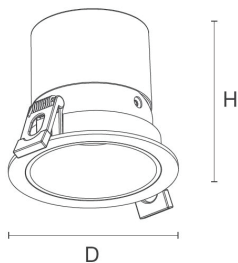

LED Spot

MQTL2085

PRODUCT DATASHEET

10W

Photometric diagram

