



Product Features

- High system efficacy up to 100lm/W
- Light without flicker reduce stress while working/living underneath
- Integrated IC constant DOB driver , CE compliant , safe and reliable
- Up to 50% energy saving compared to conventional downlight
- High-quality engineering plastic , high strength and fearless turning yellow.



Applications

- Home
- Shopping mall
- School
- Conference room



LED Downlight

MXTL1045


PRODUCT DATASHEET

15W/24W/30W

General information

Model Number	MXTL1045
Wattage	15W/24W/30W
Luminous Efficiency	100lm/W@40K&65K 90lm/W@30K
Lumen	1500lm /2400lm /3000lm
Input Voltage	220-240V
CCT	3000K/4000K/6500K
CRI	Ra>80
Power Factor	>0.5
Beam Angle	120°
IP	IP20
Class	ClassII
Working Temperature	-20 – 40°C
LED Chips	SANAN
Product Size(mm)	Ø180*35/ Ø225*35/ Ø250*35
Housing	plastic
Lifespan	15,000Hours

Dimensional Drawing

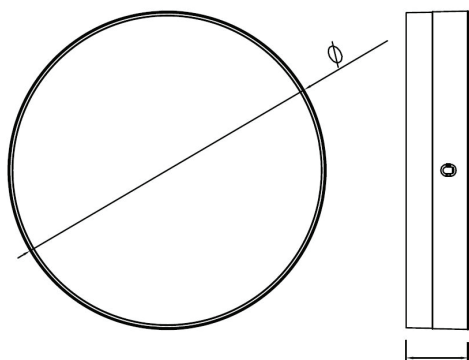

Model	Diameter Ø(mm)	Height H(mm)
MXTL1045 Round 6inch	180	35
MXTL1045 Round 8inch	225	35
MXTL1045 Round 10inch	250	35

Whole family Product




Extremely narrow, minimalist bezel design




Photometric Diagram

MXTL1045 15W

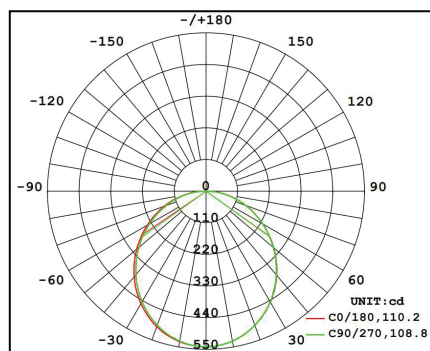

MXTL1045 24W

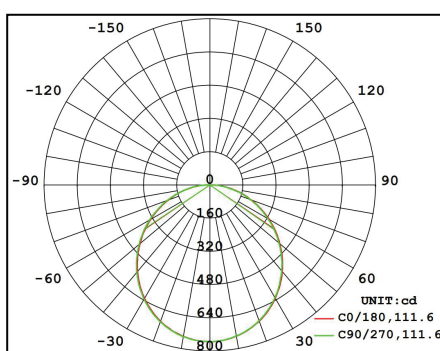

MXTL1045 30W

