


LED Office Pendant Light

MDL1018

MEGAMAN®

PRODUCT DATASHEET

60W

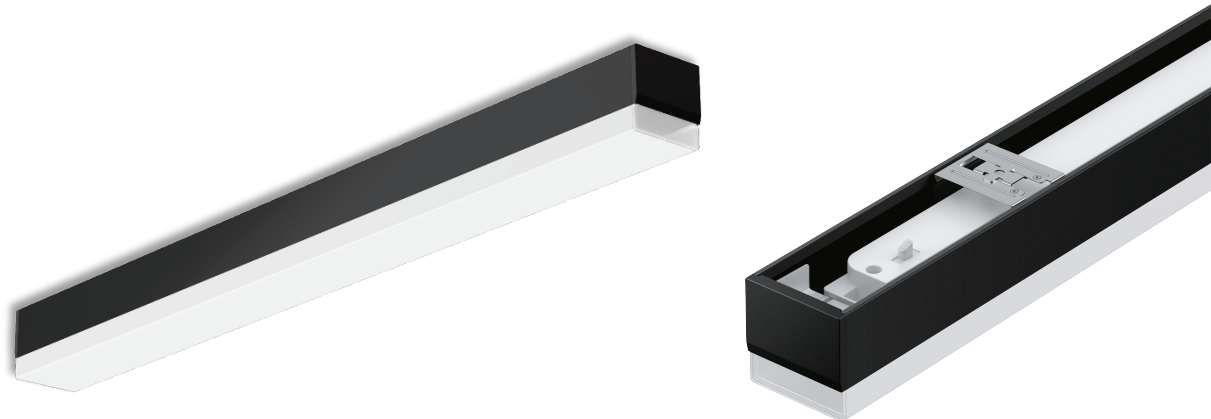

Product Features

- Stretch aluminum bracket, high strength, excellent heat dissipation performance
- Several surface treatment and color optional, beautiful and generous
- Messenger wire installation, simple operation
- Two mounting methods, pendant and surface
- Can be continuous stitching(Line/Type L/Type T/Type +), no obvious stitching dark area
- Back-lit, luminous uniform without dark area
- High luminous efficiency, up to 110lm/W
- No UV, infrared radiation, no mercury environmental protection.

Application

- Office
- Conference Room
- Shopping mall
- Supermarket



LED Office Pendant Light

MDL1018

MEGAMAN®

PRODUCT DATASHEET

60W


General Information Data

Electrical parameters	
Rated Voltage	170-240VAC
Rated Frequency	50/60Hz
Life Data	
Life Time	25000h
Switch Times	> 12500
Operation Data	
IP	IP20
Class	I
Operating Temperature	-20°C~+40°C
Storage Temperature	-20°C~+60°C
Mechanical Data	
Housing Material	AL (White or Black)
Cover Material	PC
Other	
SDCM	<6
Certification	CB/CE

Base Specification

Model	Watts (W)	PF	Luminous Flux (lm)	Efficacy (lm/W)	Ra	Beam Angle
MDL1018 60W	60W	0.9	6000/ 6600	110	80	120°

Dimensional Drawing & Packaging Information

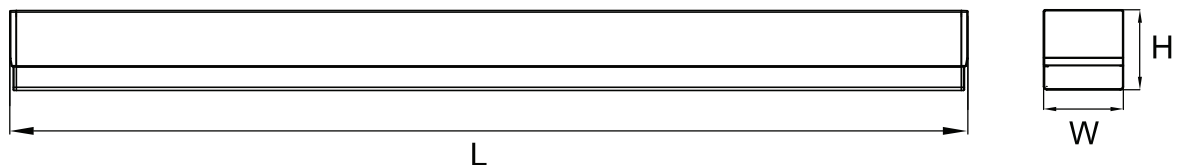


Model	L (mm)	W (mm)	H (mm)	Single Box Dimension (L*W*H)mm	Outer Box Dimension (L*W*H)mm	Packaging Unit (PCS/CTN)
MDL1018 60W	1200	50	50	1211*55*55	1225*300*130	10


LED Office Pendant Light

MDL1018

CCT switch optional

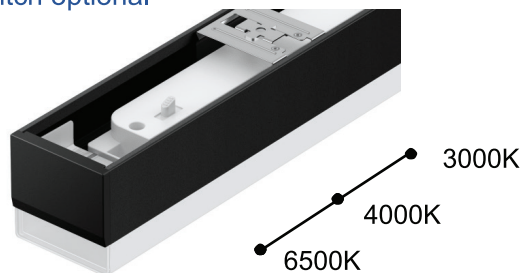

Accessories

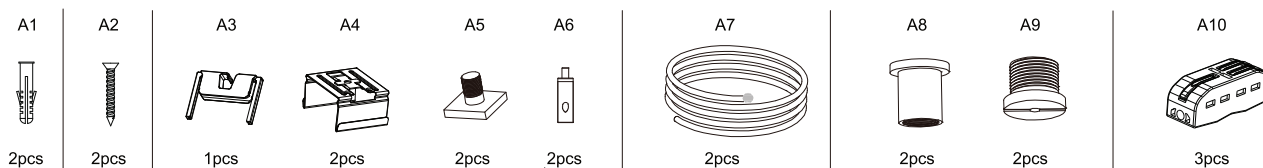

Connection Step

Line Connection



Remove the outer end caps of the two lamps

L/T- Connection



Remove the outer end cap of one lamp

Photometric Diagram

