

LED Recessed Downlight

MQTL1170

Product Features

- Metal housing zero screws design;
- Separate IC isolated drive, replaceable
- Stamping SPCC+ high reflectivity spraying;
- Big beam angle brighten large areas;
- No UV, infrared radiation, no mercury environmental protection.
- High brightness and light efficiency



Benefits

- High Lumen output, energy saving;
- External SELV driver, safe and low maintenance costs;



Application

- ※ shop, store, mall
- ※ office
- ※ hotel
- ※ home

LED Recessed Downlight


MQTL1170

PRODUCT DATASHEET
20W/30W


General Information Data

Model	MQTL1170 20W	MQTL1170 30W
Luminous	3000K-1400lm/ 4000K & 6500K- 1600lm	3000K-2430lm/ 4000K & 6500K- 2700lm
Lm/W	72lm/W	81lm/W
Input Voltage	170-240V~50/60Hz	
CCT	3000K/ 4000K/ 6500K	
CRI	≥80	
Power Factor	0.9	
Beam Angle	120°	
IP/IK	IP20/IK03	
Class	Class II	
ta	-10-+60°C	
LED Brand	SANAN 2835	
Driver Brand	MEGAMAN	
Driver Protection	SELV/ Short Circuit/ Over load Protection	
Flicker Free	-	
Dimmable	N/A	
Dimension (mm)	Ø175*35*6	Ø220*35*8
Die cut (mm)	Ø150	Ø200
Lifetime	30,000 Hours	
Housing Material	SPCC	
Cover Material	PS	
Install Way	Recessed	
Certification	CB/CE/RoHs	
Remarks		

LED Recessed Downlight
MQTL1170

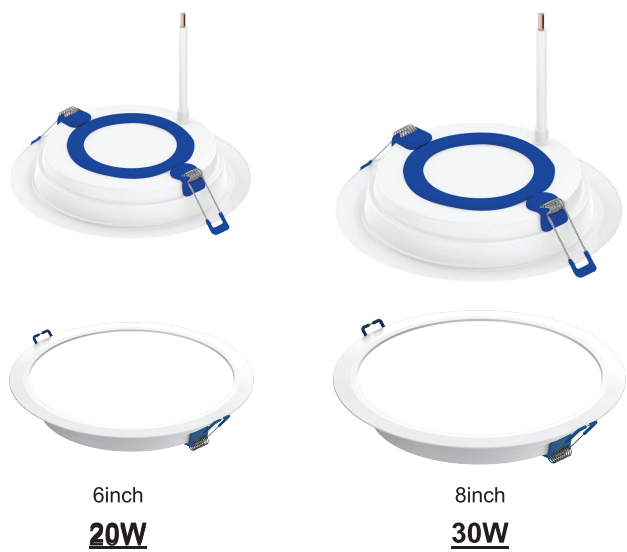

Dimension Drawing

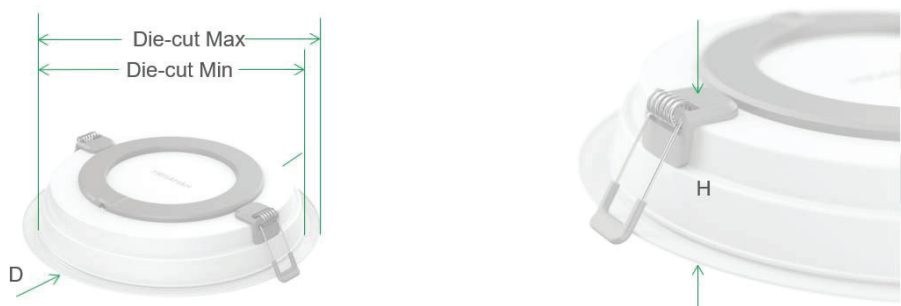

Model	D	H	Die-cut Ø	Die-cut range
MQTL1170 20W	Ø175mm	35mm	Ø200mm	Ø 183~207mm
MQTL1170 30W	Ø220mm	35mm	Ø150mm	Ø 183~207mm

Photometric Diagram

30W

