

LED Batten

MXL2121




Product Features

- Ultra-narrow end cap and built-in installation clips make it simple and beautiful appearance
- High heat dissipation aluminum housing and good transmittance PC cover
- large light-emitting surface, more lighting range;
- High light efficiency up to 100 lm/W;
- No dark areas when connection.

Application

- ※ Parking lot
- ※ Warehouse
- ※ Store, mall
- ※ Corridor
- ※ office
- ※ home

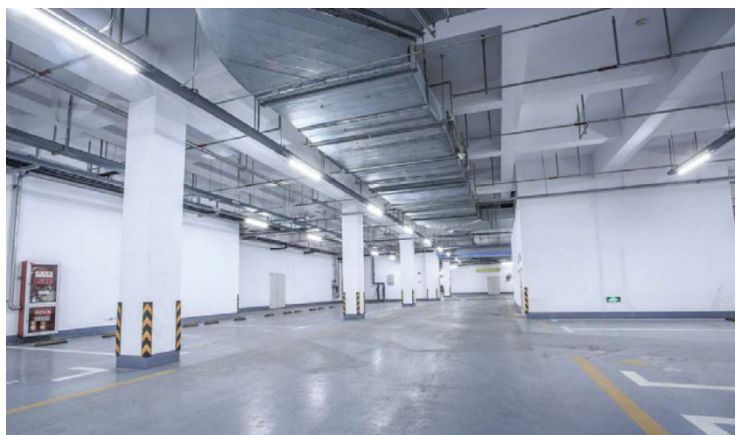

LED Batten


MXL2121

General Information Data


Model	MXL2121 L1200
Wattage	60W
Luminous	6000lm
Lm/W	100lm/W
Input Voltage	170-240V~ 50/60Hz
CCT	3000/4000/6500K
CRI	80
Power Factor	0.9
Beam Angle	120
IP/IK	IP20/IK03
Class	Class I
ta	-10~+60°C
LED Brand	SANAN 2835
Driver Brand	MEGAMAN
Driver Protection	Short Circuit/ Over load Protection
Flicker Free	N.A
Dimmable	N.A
Dimension	62*1196*30mm
Lifetime	25000hrs
Housing Material	Aluminum
Cover Material	PC
Install Way	Surface Mount
Certification	CB/EMC/RoHs
Remarks	

LED Batten MXL2121


Features

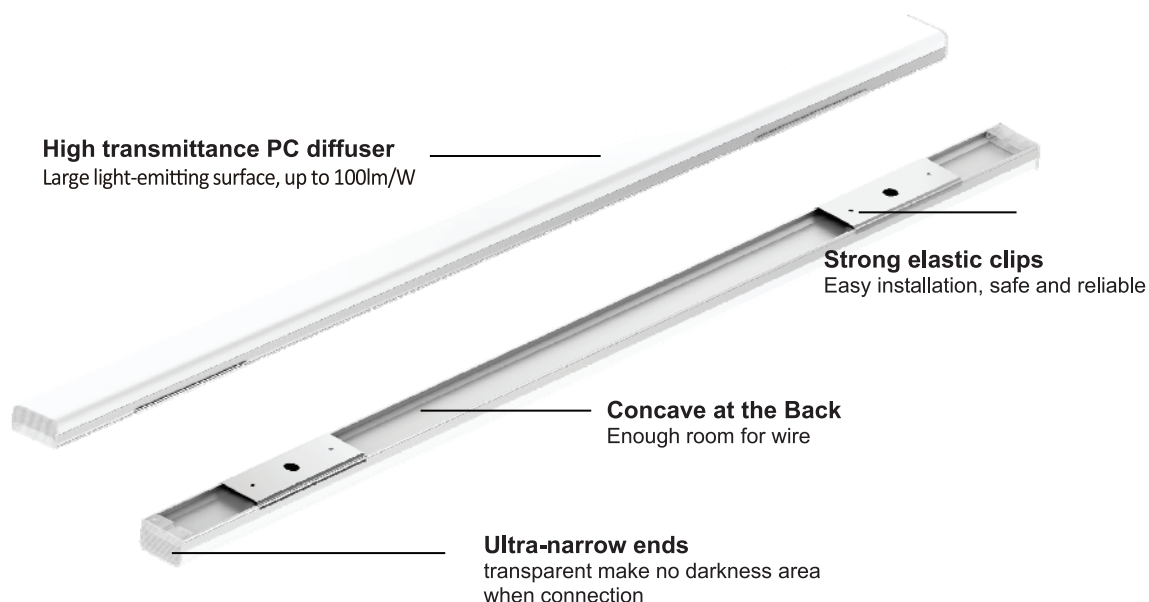

Installation guide

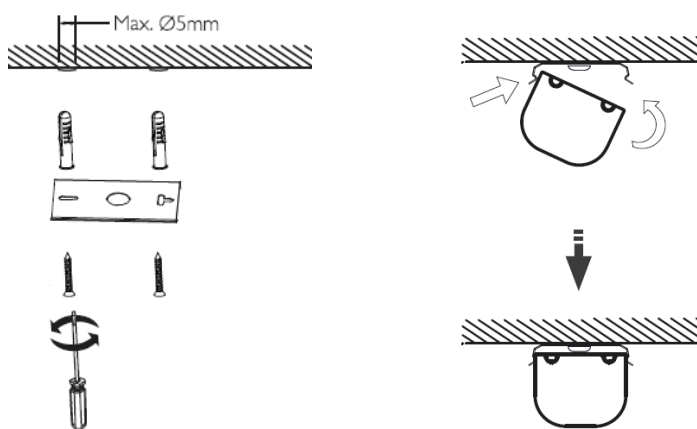

Photometric Diagram

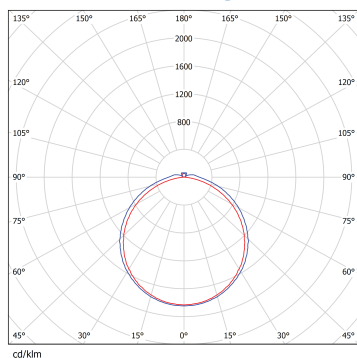

Beam diameter [m]	Beam angle [°]	E(0°)	E(C90)	E(C180)
0.5	1.70	43979	2905	3822
1.0	3.40	10995	726	956
1.5	5.09	4887	323	435
2.0	6.79	2749	182	239
2.5	8.49	1759	116	153
3.0	10.19	1222	81	106

Beam diameter [m] Beam angle [°]

— C0 - C180 (半散角: 112.2°)
— C90 - C270 (半散角: 119.0°)

